

# RETRACTABLE GATE





# RETRACTABLE GATE

Steel-framed Rullari retractable gates are designed and manufactured in Finland. The starting point for the design has been Scandinavian architecture. Kokema Oy has nearly 40 years' experience in the manufacture of retractable gates. The finishing and durable material creates a high quality, stylish design without compromising the ease of use of the gate. Rullari retractable gates are CE certified (EN13241). Retractable gate is suitable for burglary protection where you want to limit the visibility without blocking it completely. Rullari retractable gates are manufactured either as one piece with the opening on one side or in two parts with the opening in the center. They are suitable for both indoor and outdoor use. Retractable gates are manufactured according to the customer's specifications and the professional installation service all over Finland manages the installation of the gates flexibly. Applications include shopping centers, business premises, room dividers, schools, offices, restaurants, kiosks, gas stations, etc...

### STRUCTURE

- The Rullari retractable gate has a steel frame
- Frame: 16 x 16 x 2 mm
- Scissor structure: 4 x 20 mm
- Handle / lock profile: 25 x 50 x 2 mm
- Slide rail: C-profile 30 x 30 mm
- Bearings: Very smooth-moving, nylon-coated, ball-shaped slides
- Weight approx. 17 kg/m2
- The maximum size of the retractable gate is 7000 mm x 3000 mm (Note! wider retractable gates by special order)

#### **OPERATION**

Rullari retractable gates are hand operated. Size of the retracted gate is approx. 16% of the whole width of the gate.

#### LOCKING

Rullari retractable gates are equipped with an Abloy LC 306 Mortise deadlock and pull handles.


#### **SURFACE TREATMENT**

Rullari retractable gates can be galvanized and/or powder coated in RAL Classic color.

# K KOKEMA or

PL 91, Kakkulaistentie 5, 32801 Kokemäki Tel. +358 10 326 3840 <u>info@kokema.fi</u> | www.kokema.fi

## **STRUCTURE**

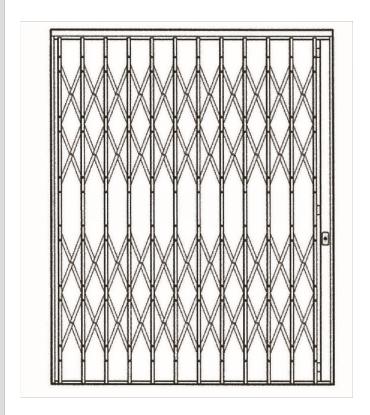

### **INSTALLATION OPTIONS**

